

## QSFP28.100G.CWDM4-10

### QSFP28, 100G, CWDM4, 10km, 2xLC



#### Особенности:

- Supports 103Gbps
- Single 3.3V Power Supply
- Power dissipation < 3.5W
- Up to 10km over SMF
- 4x25G electrical interface
- Duplex LC receptacles
- Commercial case temperature range of 0°C to 70°C
- 4\*25Gbps DFB-based CWDM transmitter
- PIN and TIA array on the receiver side
- I2C interface with integrated Digital Diagnostic Monitoring

#### Области применения:

- 100G CLR4 applications with or without FEC

Part No.	Data	Fiber	Distance *(note2)	Interface	Temp.	DDMI
QSFP28.100G.CWDM4-10 *(note1)	103Gbps	SMF	10km	LC	0°C~+70°C	Yes

Note1: also support 103Gbps

Note2: Over SMF

\*The product image only for reference purpose.

### Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	Ts	-40	+85	°C
Supply Voltage	Vcc	-0.5	3.6	V
Operating Relative Humidity	RH	5	85	%
Receiver Damage Threshold, per Lane	Rxdmg	5.5		dBm

\*Exceeding any one of these values may damage the device permanently.

### Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit
Operating Case Temperature	T <sub>c</sub>	0	25	70	°C
Power Supply Voltage	V <sub>cc</sub>	3.135	3.3	3.465	V
Power Dissipation	P <sub>D</sub>			3.5	W

### Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max	Unit	Notes
<b>Transmitter</b>						
Differential data input swing per lane				900	mv <sub>p-p</sub>	
Input Impedance (Differential)	Z <sub>in</sub>			10	%	
Stressed input parameters						
Eye width		0.46			UI	
Applied pk-pk sinusoidal jitter		IEEE 802.3bm Table 88-13				
Eye height		95			mv	
DC common mode voltage		-350		2850	mv	
<b>Receiver</b>						
Differential output amplitude		200		900	mv <sub>p-p</sub>	
Output Impedance (Differential)	Z <sub>out</sub>			10	%	
Output Rise/Fall Time	t <sub>r</sub> /t <sub>f</sub>	12			ps	20%~80%
Eye width		0.57			UI	
Eye height differential		228			mv	
Vertical eye closure				5.5	dB	

### Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
<b>Transmitter</b>					
Signaling Speed per Lane	BR <sub>AVE</sub>		25.78		Gbps
Data Rate Variation		-100		+100	ppm
Lane_0 Center Wavelength	λ <sub>C0</sub>	1264.5		1277.5	nm
Lane_1 Center Wavelength	λ <sub>C1</sub>	1284.5		1297.5	nm
Lane_2 Center Wavelength	λ <sub>C2</sub>	1304.5		1317.5	nm
Lane_3 Center Wavelength	λ <sub>C3</sub>	1324.5		1337.5	nm

## QSFP28.100G.CWDM4-10

Total Average Output Power	P <sub>o</sub>			8.5	dBm
Average Launch Power each Lane <sup>*(Note3)</sup>	P <sub>each</sub>	-6.5		2.5	dBm
Transmit OMA each Lane <sup>*(Note4)</sup>	TxOMA	-4.0		2.5	dBm
Difference in launch power between any two lanes (Average and OMA)	PD-2lane			6.0	dB
Launch power in OMA minus TDP, each lane	OMA-TDP	-5.0			dBm
Transmitter and Dispersion Penalty per Lane <sup>*(Note5)</sup>	TDP			3	dB
Average launch power of OFF transmitter, each lane	P <sub>off</sub>			-30	dBm
Side Mode Suppression Ratio	SMSR	30			dB
Optical Return Loss Tolerance		20			dB
Transmitter Reflectance <sup>*(Note6)</sup>				-20	dB
Extinction Ratio	ER	3.5			dB
Transmitter eye mask definition {X1, X2, X3, Y1, Y2, Y3} <sup>*(Note7)</sup>		{0.31, 0.4, 0.45, 0.34, 0.38, 0.4}			
<b>Receiver</b>					
Signaling Speed per Lane	BR <sub>AVE</sub>		25.78		Gbps
Data Rate Variation		-100		+100	ppm
Damage threshold	Rxdmg	3.5			dBm
Lane_0 Center Wavelength	λ <sub>C0</sub>	1264.5		1277.5	nm
Lane_1 Center Wavelength	λ <sub>C1</sub>	1284.5		1297.5	nm
Lane_2 Center Wavelength	λ <sub>C2</sub>	1304.5		1317.5	nm
Lane_3 Center Wavelength	λ <sub>C3</sub>	1324.5		1337.5	nm
Average receive power <sup>*(Note8)</sup>	Rxpow	-13		2.5	dBm
Receive Power (OMA) per Lane	RxOMA			2.5	dBm
Unstressed Receiver Sensitivity (OMA) per Lane with FEC <sup>*(Note9)</sup>	Rxsens <sub>FE C</sub>			-11	dBm
Unstressed Receiver Sensitivity (OMA) per Lane without FEC <sup>*(Note9)</sup>	Rxsens			-11.5	dBm
Stressed Receiver Sensitivity (OMA) per Lane <sup>*(Note10)</sup>	RX <sub>SRS</sub>			-8.6	dBm
Optical Return Loss	ORL			-26	dB
Conditions of stressed receiver sensitivity test					
Vertical Eye Closure Penalty <sup>*(Note11)</sup>	VECP		2.6		dB

## QSFP28.100G.CWDM4-10

Stressed J2 Jitter with FEC *(Note11)	J2		0.33		UI
Stressed J4 Jitter with FEC *(Note11)	J4		0.48		UI
SRS eye mask definition {X1, X2, X3, Y1, Y2, Y3} *(Note11)		{0.39, 0.5, 0.5, 0.39, 0.39, 0.4}			
LOS Assert	LOSA	-25			dBm
LOS De-Assert	LOSD			-15	dBm
LOS Hysteresis		0.5			dB

Note3: Average launch power, each lane (min) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance.

Note4: Even if the TDP < 1.0dB, the OMA (min) must exceed this value. Note5: TDP does not include a penalty for multi-path interference (MPI). Note6: Transmitter reflectance is defined looking into the transmitter.

Note7: Hit ratio of  $5 \times 10^{-5}$

Note8: Average receive power, each lane (min) is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant; however, a value above this does not ensure compliance.

Note9: Sensitivity is specified at  $5 \times 10^{-5}$  BER.

Note10: Measured with conformance test signal at TP3 for BER =  $5 \times 10^{-5}$ .

Note11: Vertical eye closure penalty, stressed eye J2 Jitter, stressed eye J4 Jitter, and SRS eye mask definition are test conditions for measuring stressed receiver sensitivity. They are not characteristics of the receiver.


## 4WDM-10 illustrative power budget

Description	Value	Unit
Power budget (for max TDP)	9.5	dB
Operating distance	10	km
Channel insertion loss *(Note12)	6.5	dB
Maximum discrete reflectance	-26	dB
Allocation for penalties (for max TDP)	3.0	dB
Additional insertion loss allowed	0	dB

Note12: The channel insertion loss budget may include up to 0.2 dB MPI loss penalty to support worst case transmitter/receiver with worst case connector.

## QSFP28 Transceiver Electrical Pad Layout

## QSFP28.100G.CWDM4-10

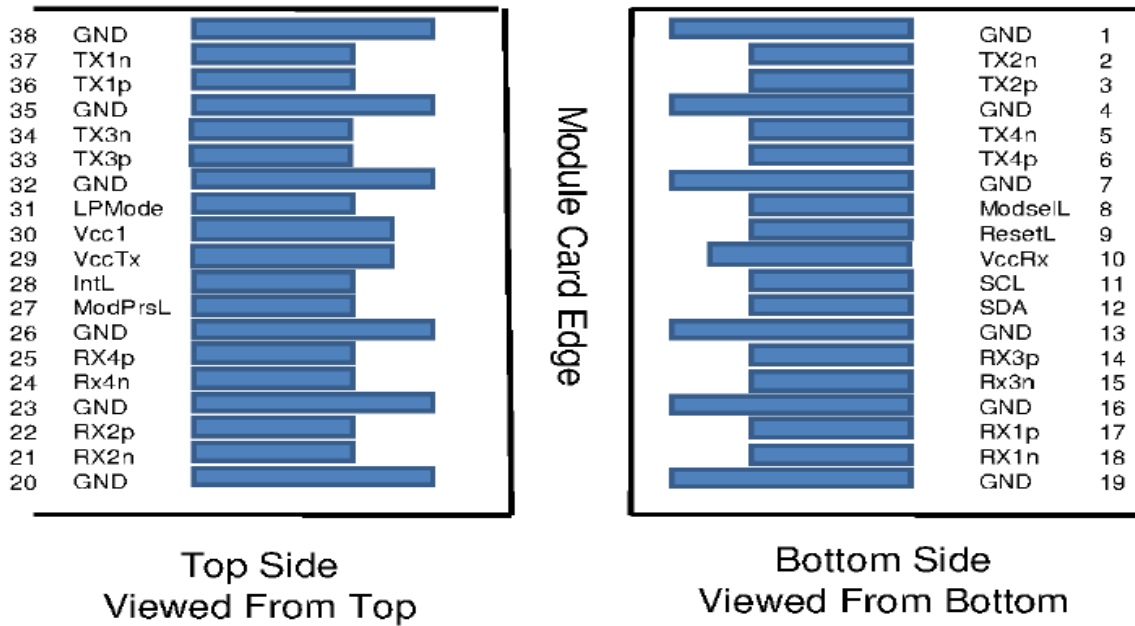

### Pin Function Definitions

Pin	Logic	Symbol	Description	Plug Sequence	Notes
1		GND	Ground	1	1
2	CML-I	Tx2n	Transmitter Inverted Data Input	3	
3	CML-I	Tx2p	Transmitter Non-Inverted Data Input	3	
4		GND	Ground	1	1
5	CML-I	Tx4n	Transmitter Inverted Data Input	3	
6	CML-I	Tx4p	Transmitter Non-Inverted Data Input	3	
7		GND	Ground	1	1
8	LVTTL-I	ModSelL	Module Select	3	
9	LVTTL-I	ResetL	Module Reset	3	

## QSFP28.100G.CWDM4-10

10		VccRx	+3.3V Power Supply Receiver	2	2
11	LVC MOS- I/O	SCL	2-wire serial interface clock	3	
12	LVC MOS- I/O	SDA	2-wire serial interface data	3	
13		GND	Ground	1	1
14	CML-O	Rx3p	Receiver Non-Inverted Data Output	3	
15	CML-O	Rx3n	Receiver Inverted Data Output	3	
16		GND	Ground	1	1
17	CML-O	Rx1p	Receiver Non-Inverted Data Output	3	
18	CML-O	Rx1n	Receiver Inverted Data Output	3	
19		GND	Ground	1	1
20		GND	Ground	1	1
21	CML-O	Rx2n	Receiver Inverted Data Output	3	
22	CML-O	Rx2p	Receiver Non-Inverted Data Output	3	
23		GND	Ground	1	1
24	CML-O	Rx4n	Receiver Inverted Data Output	3	
25	CML-O	Rx4p	Receiver Non-Inverted Data Output	3	
26		GND	Ground	1	1
27	LVTTL-O	ModPrsL	Module Present	3	
28	LVTTL-O	IntL	Interrupt	3	
29		VccTx	+3.3V Power supply transmitter	2	2
30		Vcc1	+3.3V Power supply	2	2
31	LVTTL-I	LPMODE	Low Power Mode	3	
32		GND	Ground	1	1
33	CML-I	Tx3p	Transmitter Non-Inverted Data Input	3	
34	CML-I	Tx3n	Transmitter Inverted Data Input	3	
35		GND	Ground	1	1
36	CML-I	Tx1p	Transmitter Non-Inverted Data Input	3	
37	CML-I	Tx1n	Transmitter Inverted Data Input	3	
38		GND	Ground	1	1

1: GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the QSFP28 module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.

2: Vcc Rx, Vcc1 and Vcc Tx are the receiver and transmitter power supplies and shall be applied concurrently. Requirements defined for the host side of the Host Edge Card Connector are listed in Table 6. Recommended host board power supply filtering is shown in Figures 3 and 4. Vcc Rx Vcc1 and Vcc Tx may be internally connected within the QSFP28 Module in any combination. The connector pins are each rated for a maximum current of 500mA.

QSFP28.100G.CWDM4-10

Mechanical Specifications

